

P/N: 15901-0101

Copyright

© 2025, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: 15901-0101

Release: AC

Commit: 107779

Language: en-US

Modified: 2025-09-30

Formatted: 2025-09-30

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



General description

The FLIR G609 furnace inspection camera with heat shield with IR window, protective skirt and standard lens.

Imaging & Optical data

IR resolution	640 × 480 pixels
Field of view (FOV)	6° / 24° / 24°
Focal length	92mm / 24mm / 23mm
Minimum focus distance	2 m (6.6 ft) / (0.3 m (1.0 ft.) / 1 m (3.3 ft.)
F-number	1.59 / 1.59 / 2.9
Focus	Autofocus, Manual focus
Zoom	1–8× continuous, digital zoom
Detector type	Focal plane array (FPA), cooled InSb
Detector pitch	15 μm
Sensor cooling	Stirling Microcooler (FLIR MC-3)
Image presentation modes	IR image, Visual image
Color palettes	• Arctic • White hot • Black hot • Iron • Lava • Rainbow • Rainbow HC
Radiometric IR video recording	RTRR .csq (compressed) & .seq 15hz (uncompressed)
Non-radiometric IR or visual video	H.264 to memory card .mpeg 4 file format
Radiometric IR video streaming	Over UVC
Non-radiometric IR video streaming	• H.264 (AVC) over RTSP (Wi-Fi) • MPEG4 over RTSP (Wi-Fi) • MJPEG over UVC and RTSP (Wi-Fi)
Visual recording	H.264 to memory card
Viewfinder	Built-in, tiltable OLED, 800 × 480 pixels
Built-in digital camera	5 Mpixels



FLIR G609SE 24° Standard lens

P/N: 15901-0101

© 2025, FLIR Systems, Inc.

#15901-0101; r. AC/107779; en-US

Measurement & Analysis	
Thermal sensitivity/NETD	20 mK @ +30°C (+86°F)
Measurement temperature range	-20°C to +1500°C (-4°F to +2732°F)
Accuracy	±1°C (±1.8°F) for temperature range (0°C, to +100°C, +32°F to +212°F) or ±2% of reading for temperature range (>+100°C, >+212°F)
Spotmeter	10
Area	5 boxes with max./min./average
Profile	1 line (horizontal or vertical)
Measurement corrections	Reflected temperature, distance, atmospheric transmission, humidity, external optics
Languages	21

Communication & Data storage	
FLIR Inspection route	Enabled in the camera
Cloud services (via Wi-Fi)	FLIR Ignite for direct, secure image uploading, organizing, storage, and sharing (required firmware available), wireless file transfer via userweb library
Bluetooth	Communication with headset
Storage media	Removable SD memory card
Image file formats	Standard JPEG, measurement data included. Infrared-only mode.
Communication interfaces	USB 2.0, Bluetooth, Wi-Fi, HDMI
Video out	HDMI 640 × 480 HDMI 1280 × 720 DVI 640 × 480 DVI 800 × 600
Radio	Operating frequency - Bluetooth + EDR: 2402–2480 MHz - WLAN 2.4 GHz: 2412–2462 MHz - WLAN 5 GHz: 5150–5250 MHz Note that frequency band 5150–5250 MHz is for indoor use only, see national regulations. RF output (EIRP) - Bluetooth + EDR: < 10 dBm - WLAN: < 17 dBm Antenna - Integrated PIFA antenna (gain: maximum 2.6 dBi)
Recording modes	Multi-REC, Periodic storage

General	
Package size	600 × 510 × 410 mm (23.6 × 20.1 × 16.1 in.)
Package weight	14.2 kg (31.3 lb.)
Camera size	251.6 × 164.5 × 170.9 mm (9.9 × 6.48 × 6.73 in.)
Camera weight	3.0 kg (6.61 lb.)
Mounting interface	UNC ¼"-20

P/N: 15901-0101

© 2025, FLIR Systems, Inc.

#15901-0101; r. AC/107779; en-US

General	
List of contents	- Infrared camera with lens - Battery, 2 pcs. - Battery charger - Power supply - Hand strap - Neck strap - Lens cap - Lens cap strap - Memory card - HDMI-HDMI cable - USB cable - Screwdriver TX20 - Knob screw (optional screw for the rear cover) - Printed documentation - Hard transport case - Camera Body "Lens" Cap - Heatshield with skirt and pouch
GPS	Location data automatically added to every still image and first frame in video from built-in GPS
Laser pointer	Class 2 Semiconductor AlGaInP diode laser, 1 mW, 635 nm (red)
EAN-13	7332558034453
UPC-12	845188031985
Country of origin	Sweden
User interface	
Display	640 × 480 pixels (VGA)
Display frame rate	60 Hz
Voice	60 seconds with Bluetooth on still images and video
Text	Text from predefined list or soft keyboard on touchscreen
Image sketch	Yes: on infrared images
Power	
Battery type	Rechargeable Li ion battery
Battery weight	232 g (8.2 oz.)
Battery voltage	7.4 V
Battery capacity	5.5 Ah
Battery operating time	> 2 hours at 25°C (+68°F) and typical use
Battery charging time	2.5 h to 95% capacity, charging status indicated by LED's
Battery code	UN3481
Startup time	Typically 7 min. @ 25°C (+77°F)
Battery documents	For documents like MSDS and UN38.3 test reports/summaries, see: https://support.flir.com/resources/msds
Environmental & Certifications	
Operating temperature range	−20°C to +50°C (−4°F to +122°F)
Storage temperature range	−30°C to +60°C (−22°F to +140°F)
Humidity	IEC 60068-2-30 / 24h 95% Relative Humidity +25°C to +40°C (+77°F to +104°F) (2 cycles)
RoHS and Reach Directive	2011/65/EU
WEEE	2012/19/EU



FLIR G609SE 24° Standard lens

P/N: 15901-0101

© 2025, FLIR Systems, Inc.


#15901-0101; r. AC/107779; en-US

Environmental & Certifications	
RoHS	2011/65/EU
WEEE	2012/19/EU
RED	2014/53/EU
EMC	• ETSI EN 301 489-1 (radio) • ETSI EN 301 489-17 • EN 55032 (emission) • EN 55035 (immunity) • EN 61000-4-8 Level 5 (magnetic field) • EN 61000-6-2, Immunity Industrial Environment • FCC 47 CFR part 15 B, class B (emission) • ICES-003
Radio spectrum	• ETSI EN 300 328 • ETSI EN 301 893 • FCC 47 CFR part 15 C • FCC 47 CFR part 15 E • RSS-247
Encapsulation	IP 54 (IEC 60529)
Shock	25 g (IEC 60068-2-27)
Vibration	2 g (IEC 60068-2-6)
Declaration of conformity	See: https://support.flir.com/resources/DoC


Supplies & accessories:

- T300571ACC; Battery charger G-series
- T300450ACC; Battery G-series
- T131735ACC; Camera body cap
- T912246ACC; Car adapter 12 V, round connector
- T301016; Furnace Lens 24° 3-5µm Motor Foc w. Case
- T131757ACC; Hand strap
- T300580ACC; Hard transport case for FLIR G-series
- T300990; Heat shield for Furnace lens 24°
- T132073; Heat shield skirt
- T300685; Lens 24° 3-5µm Motor Focus
- T300679; Lens 6° 3-5µm Motor Focus
- T131726ACC; Lens cap, back
- T131724ACC; Lens cap, front 80 mm
- T131725ACC; Lens cap, front 92 mm
- T131758ACC; Neck strap
- T300989; Heat shield for Standard lenses
- T911881ACC; Camera bag and harness, G series
- T911975ACC; Memory card SD 16 GB
- T910891ACC; HDMI type C to HDMI type A cable 1.5 m
- T300030; Option, No radio
- T129867ACC; Lens cap strap
- T911633ACC; Power supply for battery charger
- T911940ACC; USB 2.0 A to USB Type-C cable, 1.0 m
- T911309ACC; Screwdriver TX20

Fully opened display

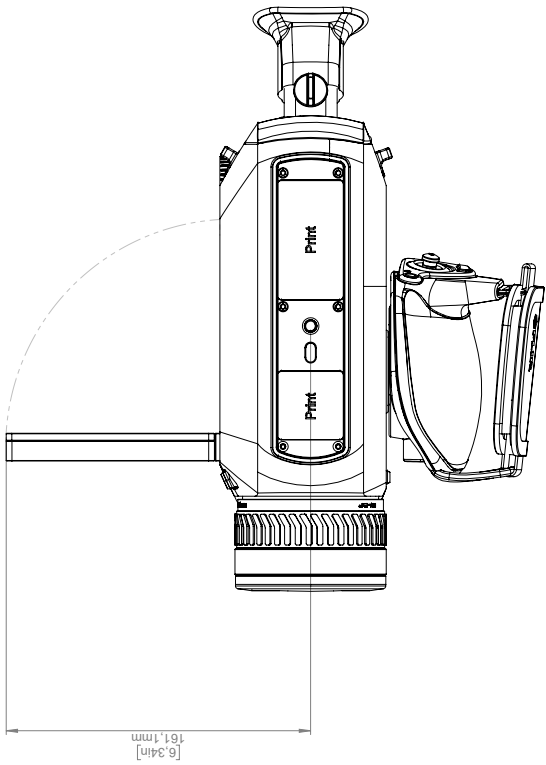

Closed with rotated display

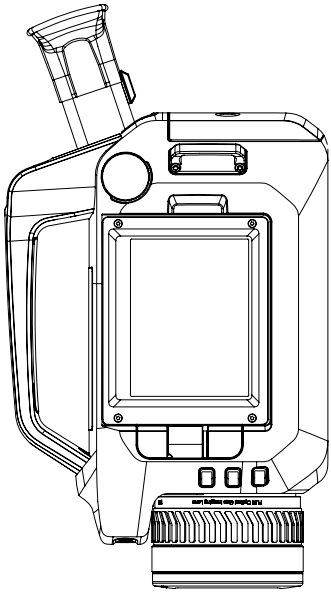

With IR Lens 6°

